

HVAC PLAN
1/4"=1'-0"

PLAN NOTES:


1. INSTALLATION FOR HVAC IN THE REMODEL AREA SHALL MEET DMC 2017.
2. ADD FLEXIBLE DUCT AS REQUIRED BASED ON FIELD CONDITIONS.
3. BASED ON ARCHITECTURAL PLAN DATED 06/11/2018.
4. BASED ON ASHRAE 62.1-2010 FOR OUTSIDE AIR NO CHANGE OF USE - OFFICE TO OFFICE.
5. NEW DEVICES BASED ON KRUEGER OR EQUAL.
6. VERIFY BRANCH SIZES IN THE FIELD.
7. ABOVE CEILING PLENUM.

CODED NOTES:

- 1- EXISTING TO REMAIN
- 2- RELOCATE DEVICE AS SHOWN.
- 3- RELOCATE EXISTING DEVICE; ADD FLEX AS REQUIRED BASED ON FIELD CONDITIONS; FIELD VERIFY SIZE.
- 4- NEW 8" DIFFUSER, RUN BRANCH DUCT (ROUND &/OR FLEX) AS REQUIRED TO EXISTING.
- 5- NEW 24x12 RAG.

THIS DRAWING AND DESIGN IS THE PROPERTY OF CUSTOM AIR AND IT IS TO BE USED FOR INSTALLATION BY CUSTOM AIR ONLY. IT SHALL NOT BE USED, REPRODUCED, OR COPIED IN THE WHOLE WITHOUT CONSENT OF CUSTOM AIR.

ISSUED FOR: DATE:
PRELIMINARY *
PERMIT * 6/12/18
CONSTRUCTION *

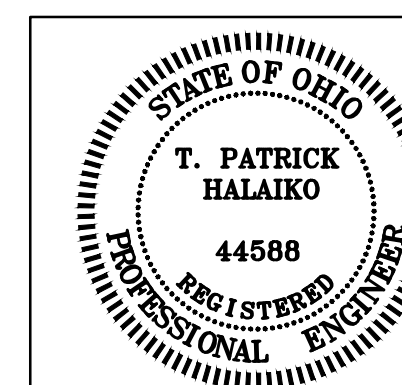

935 Claycraft Road
Gahanna, OH 43230
Phone (614) 552-4822
Fax (614) 552-2837

REVISIONS	DATE	SHEET TITLE: HVAC PLAN
1-	*	PROJECT NAME: COLUMBUS ONCOLOGY 810 JASONWAY AVE.
DRAWN BY: KL,MSM		JOB NUMBER: CA182563
CHECKED BY: JM		SHEET NUMBER: H-1
DATE: 6/12/2018		